

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE SOUTH BOUNDARY

THE EAST BOUNDARY

A PORTION OF THE NORTH BOUNDARY

AND

A PORTION OF THE SUBDIVISIONAL LINES

IN

TOWNSHIP 3 SOUTH, RANGE 11 WEST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Daniel T. Gillins
Survey Technician

Under the Supervision of

Ronald K. Baugh
Supervisory Cadastral Surveyor

Under Special Instructions dated **August 21, 2007**, approved **August 21, 2007**, which provided for the surveys included under Group Number **1041**, and assignment instructions dated **August 21, 2007**.

Survey commenced **October 27, 2007**
Survey completed **November 7, 2007**

INDEX DIAGRAM

Township 3 South, Range 11 West

6	5	4	11 15 3	10 15 2	9 16 1 9
7	8	9	14 10	16 11	12 8
18	17	16	14 15	14	13 7
19	20	21	13 22	23	24 7
30	29	28	13 27	26	25 6
31	32	33	13 34 5	35 4	12 12 36 5 4

TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH.

The following field notes are those of the dependent resurvey of a portion of the south boundary, the east boundary, a portion of the north boundary, and a portion of the subdivisional lines, in Township 3 South, Range 11 West, Salt Lake Meridian, Utah.

History of Surveys**Surveyed by****Retr. or Resurveyed by****SOUTH BOUNDARY**

All	C.P. Sylvester & R.S. Kaiser	1960
-----	---------------------------------	------

EAST BOUNDARY

All	A.J. Stookey	1909	
All			C.P. Sylvester & R.S. Kaiser 1960

WEST BOUNDARY

All	C.P. Sylvester & R.S. Kaiser	1960
-----	---------------------------------	------

NORTH BOUNDARY

All	H.W. Miller & R.E. Clark	1913
-----	-----------------------------	------

SUBDIVISION

Portion	C.P. Sylvester & R.S. Kaiser	1960
---------	---------------------------------	------

TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1041, dated August 21, 2007.

The direction of the lines was determined by references to true meridians, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods, dated May 9, 2001, Version 1.0. Trimble model 5800 GPS receivers were used for field collection. Cadastral Automated Plat Drafting (CAPD) software was the primary software utilized for the project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Cadastral Control Network was derived by GPS observations from published coordinates of the National Geodetic Survey station "WATSON".

The published geographic position of the "WATSON" station, from the National Geodetic Survey Data Sheet, is as follows:

Latitude: 40°33'46.98120" N. Longitude: 113°04'47.81407" W.
N.A.D. 1983(1994)
N.A.V.D. 1988, Elevation: 4403 ft.

The geographic position of the corner of Townships 2 and 3 South, Ranges 10 and 11 West, as determined by a tie to the National Geodetic Survey Station "WATSON" is as follows:

Latitude: 40°35'38.633" N.
Longitude: 113°01'45.663" W.
N.A.D. 1983

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of the South Boundary,
Township 3 South, Range 11 West, Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
C.P. Sylvester & R.S. Kaiser in 1960.

Beginning at the point for the corner of Townships 3 and 4 South, Ranges 10 and 11 West, at proportionate distance, there is no remaining evidence of the 1909 iron post monument.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 26 inches in the ground, with aluminum cap marked:

T 3 S	
R 11 W	R 10 W
S 36	S 31
S 1	S 6
T 4 S	
2007	

Set a steel fence post along the east side of the aluminum post.

Corner is located 3 feet north of the bottom of a drainage, course west.

From this point:

The 1/4 section corner of sections 6 and 31, Townships 3 and 4 S., Range 10 W., bears S. 89°58.4' E., 39.985 chains distance, monumented with an iron post, 1 inch in diameter, projecting 20 inches above the ground, with a mound of stone, 3 foot base, 1 1/2 feet high, 2 links north, with a brass cap marked as described in the official record of the 1909 survey of the north boundary of Township 4 South, Range 10 West.

Set a steel fence post 1 link south of the iron post.

Corner is located 7 feet south of the bottom of a small drainage, course northwest.

From this same point the 1/4 section corner of sections 1 and 6, Township 4 S., Ranges 10 and 11 W., bears S. 0°09.7' E., 44.062 chains distance, determined from the remains of an iron post, 1 inch in diameter, firmly set, broken at ground

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

surface, with the remaining iron post lying out of the ground, 24 inches long, with a brass cap attached, marked as described in the official record of the 1909 survey.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, set 26 inches in the ground, with aluminum cap marked:

T 4 S
R 11 W R 10 W
1/4
S 1 | S 6
2007

Deposit the iron post and cap alongside the aluminum post.

Set a steel fence post along the north side of the aluminum post.

S. 89°59.4' W., between sections 1 and 36.

- 39.985** The 1/4 section corner of sections 1 and 36, monumented with an iron post, 2 1/2 inches in diameter, set in a mound of stone, 3 foot base, to top of brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 3 links west of the aluminum post.

S. 89°58.5' W., beginning new measurement.

- 40.042** The corner of sections 1, 2, 35, and 36, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 10 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links north, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 2 links west of the iron post.

S. 89°58.4' W., between sections 2 and 35.

- 40.002** The 1/4 section corner of sections 2 and 35, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 12 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links north, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 2 links west of the iron post.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

S. 89°58.3' W., beginning new measurement.

- 40.010** The corner of sections 2, 3, 34, and 35, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 10 inches above the ground, with a mound of stone, 3 foot. base, 1 1/2 feet high, 2 links north, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link west of the iron post.

S. 89°59.4' W., between sections 3 and 34.

- 40.038** The 1/4 section corner of sections 3 and 34, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 6 inches above the ground, with a mound of stone, 3 foot base, 1 1/2 feet high, 2 links north, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link west of the iron post.

S. 89°58.9' W., beginning new measurement.

- 39.998** The corner of sections 3, 4, 33, and 34, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 6 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links north, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link west of the iron post.

Dependent Resurvey of the East Boundary,
Township 3 South, Range 11 West, Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by A.J. Stookey in 1909
and the Retracement by C.P. Sylvester & R.S. Kaiser in 1960.

From the corner of Townships 3 and 4 South, Ranges 10 and 11 West, hereinbefore described.

N. 0°01.6' E., between sections 31 and 36.

- 40.021** The 1/4 section corner of sections 31 and 36, determined from the remains of an iron post, 1 inch in diameter, firmly set, broken at ground surface, with the remaining iron post lying out of the ground, 18 inches long, with a brass cap attached, marked as described in the official record of the 1909 survey, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west.

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 28 inches in the ground, with aluminum cap marked:

T 3 S
R 11 W R 10 W
1/4
S 36 | S 31
2007

Deposit the iron post and cap alongside the aluminum post.

Set a steel fence post along the north side of the aluminum post.

N. 0°02.0' W., beginning new measurement.

40.003 The corner of sections 25, 30, 31, and 36, monumented with an iron post, 3 inches in diameter, loosely set, projecting 26 inches above the ground, in a scattered mound of stone, with brass cap marked as described in the official record of the 1909 survey.

Rebuild the mound of stone, 4 foot base, around post to top of brass cap.

Set a steel fence post 3 links north of the iron post.

N. 0°02.4' W., between sections 25 and 30.

40.050 The 1/4 section corner of sections 25 and 30, determined from the remains of an iron post, 1 inch in diameter, firmly set, broken at ground surface, with the remaining iron post lying out of the ground, 16 inches long, with a brass cap attached, marked as described in the official record of the 1909 survey.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 28 inches in the ground, with aluminum cap marked:

T 3 S
R 11 W R 10 W
1/4
S 25 | S 30
2007

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit the iron post and cap alongside the aluminum post.

Set a steel fence post along the north side of the aluminum post.

N. 0°08.1' W., beginning new measurement.

- 40.108** The corner of sections 19, 24, 25, and 30, monumented with an iron post, 3 inches in diameter, projecting 26 inches above the ground, in a scattered mound of stone, with brass cap marked as described in the official record of the 1909 survey.

Rebuild the mound of stone, 3 foot base, 20 inches high, around the iron post.

Set a steel fence post 3 links north of the iron post.

N. 0°01.1' E., between sections 19 and 24.

- 40.048** The 1/4 section corner of sections 19 and 24, monumented with an iron post, 1 inch in diameter, projecting 14 inches above a mound of stone, 2 foot base, 4 inches high, with brass cap marked as described in the official record of the 1909 survey.

Set a steel fence post 1 link north of the iron post.

N. 0°00.1' W., beginning new measurement.

- 40.080** The corner of sections 13, 18, 19, and 24, monumented with an iron post, 3 inches in diameter, projecting 18 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west, with brass cap marked as described in the official record of the 1909 survey.

Set a steel fence post, 1 link north of the iron post.

N. 0°09.9' W., between sections 13 and 18.

- 40.015** The 1/4 section corner of sections 13 and 18, determined from the remains of an iron post, 1 inch in diameter, firmly set, broken at ground surface, with the remaining iron post lying out of the ground, 10 inches long, with a brass cap attached, marked as described in the official record of the 1909 survey.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 20 inches in the ground, in a mound of stone, 3 foot base to top of aluminum cap marked:

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T 3 S
R 11 W R 10 W
1/4
S 13 | S 18
2007

Deposit the iron post and cap alongside the aluminum post.

Set a steel fence post along the north side of the aluminum post.

N. 0°04.0' E., beginning new measurement.

- 40.095** The corner of sections 7, 12, 13, and 18, monumented with an iron post, 3 inches in diameter, firmly set, projecting 6 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west, with brass cap marked as described in the official record of the 1909 survey.

Set a steel fence post along the north side of the iron post.

N. 0°02.4' W., between sections 7 and 12.

- 40.083** Point for the 1/4 section corner of sections 7 and 12, at proportionate distance. At this point, found an iron post, 1 inch diameter, rusted and broken, lying out of the ground, with a brass cap attached, marked as described in the official record of the 1909 survey.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 28 inches in the ground, with aluminum cap marked:

T 3 S
R 11 W R 10 W
1/4
S 12 | S 7
2007

Deposit the iron post and cap alongside the aluminum post.

Set a steel fence post along the north side of the aluminum post.

- 80.116** The corner of sections 1, 6, 7, and 12, monumented with an iron post, 3 inches in diameter, firmly set, projecting 14 inches above the ground, with brass cap marked as described in the official record of the 1909 survey.

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set a steel fence post along the southeast side of the iron post.

N. $0^{\circ}02.6'$ W., between sections 1 and 6.

- 40.083** The $1/4$ section corner of sections 1 and 6, monumented with an iron post, 1 inch in diameter, firmly set, projecting 12 inches above a collar of stone, 2 foot base, with brass cap marked as described in the official record of the 1909 survey.

Set a steel fence post along the west side of the iron post.

N. $0^{\circ}02.5'$ W., between sections 1 and 6.

- 40.070** The corner of Townships 2 and 3 South, Ranges 10 and 11 West, monumented with an iron post, 3 inches in diameter, firmly set, projecting 14 inches above the ground, with a mound of stone, 3 foot base, 2 feet high, 2 links distance south, with a brass cap marked as described in the official record of the 1909 survey.

Set a steel fence post along the north side of the iron post.

Dependent Resurvey of a portion of the North Boundary,
Township 3 South, Range 11 West, Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
H.W. Miller & R. E. Clark in 1913.

From the corner of Townships 2 and 3 South, Ranges 10 and 11 West, hereinbefore described.

S. $89^{\circ}59.9'$ W., between sections 1 and 36.

- 40.016** The $1/4$ section corner of sections 1 and 36, monumented with an iron post, 1 inch in diameter, buried 2 inches below the ground surface, with brass cap marked as described in the official record of the 1913 survey.

Raise a mound of stone, 2 foot base, 1 $1/2$ feet high, north. of the corner.

N. $89^{\circ}59.7'$ W., beginning new measurement.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

20.006 Point for the W 1/16 section corner of sections 1 and 36.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 28 inches in the ground, with aluminum cap marked:

S 36
W 1/16 —————
S 1
2007

Set a steel fence post along the west side of the aluminum post.

40.012 The corner of sections 1, 2, 35, and 36, monumented with an iron post, 3 inches in diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1913 survey.

Corner is located under a barbed wire fence, bears east and west.

N. 89°59.1' W., between sections 2 and 35.

40.038 The 1/4 section corner of sections 2 and 35, determined at the remains of an iron post, 1 inch diameter, firmly set, broken at ground surface, with the remaining iron post lying out of the ground, 18 inches long, with a brass cap attached, marked as described in the official record of the 1913 survey.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, set 27 inches in the ground, with aluminum cap marked:

T 2 S R 11 W
S 35
1/4 —————
S 2
T 3 S
2007

Deposit the iron post and cap alongside the aluminum post.

Corner is located under a barbed wire fence, bears east and west, along the east side of a steel fence post.

S. 89°59.7' W., beginning new measurement.

40.019 The corner of sections 2, 3, 34, and 35, monumented with an iron post, 3 inches in diameter, projecting 8 inches above the ground, with brass cap marked as described in the official

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

record of the 1913 survey.

Corner is located under a barbed wire fence, bears east and west.

N. 89°58.8' W., between sections 3 and 34.

- 40.033** The 1/4 section corner of sections 3 and 34, determined from the remains of an iron post, 1 inch in diameter, firmly set, broken at ground surface, with the remaining iron post lying out of the ground, 28 inches long, with a brass cap attached, marked as described in the official record of the 1913 survey.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 28 inches in the ground, with aluminum cap marked:

T 2 S R 11 W
S 34
1/4 —————
S 3
T 3 S
2007

Deposit the iron post and cap alongside the aluminum post.

Corner is located under barbed wire fence, bears east and west.

N. 89°58.8' W., beginning new measurement.

- 40.012** The corner of sections 3, 4, 33, and 34, determined from the remains of an iron post, 3 inches in diameter, firmly set, broken at ground surface, with the remaining iron post lying out of the ground, 22 inches long, with a brass cap attached, marked as described in the official record of the 1913 survey.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 29 inches in the ground, with aluminum cap marked:

T 2 S R 11 W
S 33 S 34
S 4 S 3
T 3 S
2007

Deposit the iron post and cap alongside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located 1 foot south of a barbed wire fence, bears east and west.

Dependent Resurvey of a Portion of the Subdivisional Lines,
Township 3 South, Range 11 West, Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
C.P. Sylvester & R.S. Kaiser in 1960.

From the corner of sections 1, 2, 35, and 36, on the south boundary of the township, hereinbefore described.

N. 0°04.5' W., between sections 35 and 36.

39.991 The 1/4 section corner of sections 35 and 36, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 12 inches above a collar of stone, 3 foot base, with brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link north of the iron post.

N. 0°05.9' W., beginning new measurement.

39.991 The corner of sections 25, 26, 35, and 36, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 12 inches above a collar of stone, 3 foot base, with brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link north of the iron post.

From the corner of sections 25, 30, 31, and 36, on the east boundary of the township, hereinbefore described.

S. 89°54.9' W., between sections 25 and 36.

40.132 The 1/4 section corner of sections 25 and 36, monumented with an iron post, 2 1/2 inches in diameter, loosely set, projecting 28 inches above a scattered mound of stone, with brass cap marked as described in the official record of the 1960 survey.

Rebuild the mound of stone, 4 foot base, around post to top of brass cap.

Set a steel fence post 4 1/2 links north of the iron post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

S. 89°59.4' W., beginning new measurement.

39.994 The corner of sections 25, 26, 35, and 36.

From the corner of sections 3, 4, 33, and 34, on the south boundary of the township, hereinbefore described.

N. 0°05.8' W., between sections 33 and 34.

40.002 The 1/4 section corner of sections 33 and 34, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 8 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link north of the iron post.

N. 0°04.2' W., beginning new measurement.

40.010 The corner of sections 27, 28, 33, and 34, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link north of the iron post.

N. 0°05.6' W., between sections 27 and 28.

39.986 The 1/4 section corner of sections 27 and 28, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 6 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link north of the iron post.

N. 0°05.7' W., beginning new measurement.

40.023 The corner of sections 21, 22, 27, and 28, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 6 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link north of the iron post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°05.6' W., between sections 21 and 22.

- 40.001** The 1/4 section corner of sections 21 and 22, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 6 inches above the ground, with a mound of stone, 2 foot base, 1 foot high, 2 links west, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link north of the iron post.

N. 0°05.1' W., beginning new measurement.

- 39.992** The corner of sections 15, 16, 21, and 22, monumented with an iron post, 2 1/2 inches in diameter, projecting 6 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west, with a brass cap marked as described in the official record of the 1960 survey.
-

N. 0°05.7' W., between sections 15 and 16.

- 40.029** The 1/4 section corner of sections 15 and 16, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 8 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links northeast, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link north of the iron post.

N. 0°04.4' W., beginning new measurement.

- 40.002** The corner of sections 9, 10, 15, and 16, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 10 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link north of the iron post.

From this corner, the National Geodetic Survey station "WATSON," bears S.68°43.3'E., 28.988 chains distance, monumented with a steel disk, 2 inches in diameter, seated in a concrete monument, 8 inches in diameter, on top of the southern end of a hill.

N. 0°05.3' W., between sections 9 and 10.

- 39.982** The 1/4 section corner of sections 9 and 10, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

6 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link north of the iron post.

N. 0°04.2' W., beginning new measurement.

- 39.998** The corner of sections 3, 4, 9, and 10, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 12 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link north of the iron post.

N. 0°02.0' W., between sections 3 and 4.

- 40.003** The 1/4 section corner of sections 3 and 4, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 12 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post 1 link north of the iron post.

N. 0°03.6' W., beginning new measurement.

- 40.772** The corner of sections 3, 4, 33, and 34, on the north boundary of the township, hereinbefore described.
-

From the corner of sections 2, 3, 34, and 35, on the north boundary of the township, hereinbefore described.

S. 0°02.1' E., between sections 2 and 3.

- 40.582** The 1/4 section corner of sections 2 and 3, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 6 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post along the northwest side of the iron post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 3 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

S. 0°02.3' E., beginning new measurement.

- 40.000** The corner of sections 2, 3, 10, and 11, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 14 inches above the ground, with a mound of stone, 2 foot base, 1 1/2 feet high, 2 links west, with a brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post along the north side of the iron post.

N. 89°52.7' E., between sections 2 and 11.

- 39.988** The 1/4 section corner of sections 2 and 11, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 6 above the ground, with brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post along the east side of the iron post.

N. 89°53.3' E., beginning new measurement.

- 39.991** The corner of sections 1, 2, 11, and 12, monumented with an iron post, 2 1/2 inches in diameter, firmly set in a mound of stone, 3 foot base, to top of brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post along the west side of the iron post.

N. 0°01.4' E., between sections 1 and 2.

- 40.007** The 1/4 section corner of sections 1 and 2, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 4 inches above a mound of stone, 3 foot base, 4 inches high, with brass cap marked as described in the official record of the 1960 survey.

Set a steel fence post along the north side of the iron post.

N. 0°02.3' E., beginning new measurement.

- 40.406** The corner of sections 1, 2, 35, and 36, on the north boundary of the township, hereinbefore described.
-

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Name	Capacity
Calvert C. Norton	Survey Technician

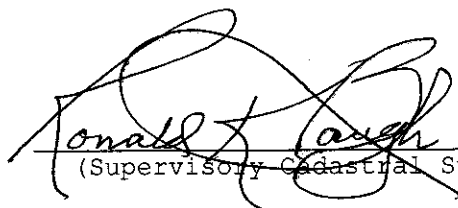
CERTIFICATE OF SURVEY

We, **Ronald K. Baugh**, Supervisory Cadastral Surveyor, and **Daniel T. Gillins**, Survey Technician, hereby certify upon honor, that in pursuance of special instructions bearing the date of the **21st day of August, 2007**, we have **dependently resurveyed a portion of the south boundary, the east boundary, a portion of the north boundary, and a portion of the subdivisional lines in Township 3 South, Range 11 West,**

of the **Salt Lake Meridian**, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions of the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

Nov. 08, 2008

Date


(Supervisory Cadastral Surveyor)

Oct. 31, 2008

Date


(Survey Technician)

CERTIFICATE OF APPROVAL


BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the **dependent resurvey of a portion of the south boundary, the east boundary, a portion of the north boundary, and a portion of the subdivisional lines in Township 3 South, Range 11 West, Salt Lake Meridian, Utah,**

Executed by **Ronald K. Baugh**, Supervisory Cadastral Surveyor, and **Daniel T. Gillins**, Survey Technician, having been critically examined and found correct, are hereby approved.

December 9, 2008

Date


(Chief Cadastral Surveyor for Utah)